


机型: YF-7590T UV平板机 UV Flatbed Printer

机器简介

Introduction of the machine

- ◆ 多种喷头配置, 可选理光、东芝喷头
Ricoh、Toshiba print head optional
- ◆ 高精度自动测高系统
Automatic height detection system
- ◆ 灵敏的小车防撞系统
Anti-collision system
- ◆ 智能恒温墨路系统
Intelligent constant temperature ink system
- ◆ 采用LED冷温固化技术, 更长使用寿命, 更低能耗
LED UV water cooling system, high performance, longer lifetime, and low energy consumption
- ◆ 智能墨水液位报警提示系统
Intelligent ink level alarm system
- ◆ 圆柱打印支架选配
Cylinder material holder is optional

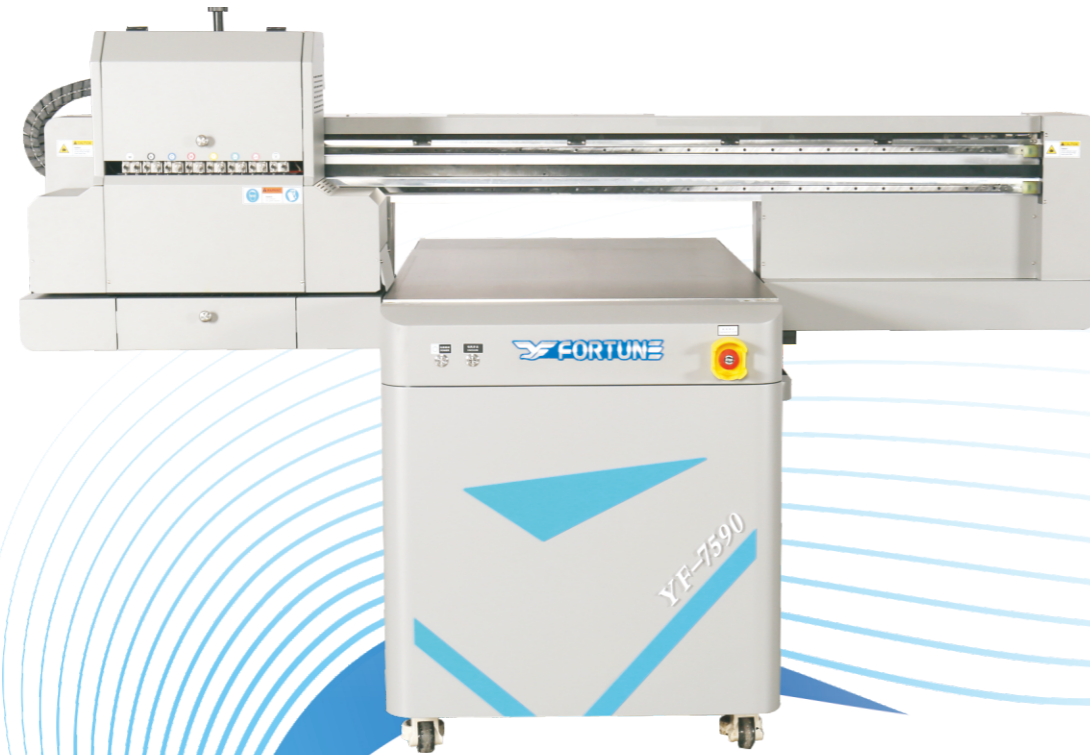

行业应用

Industry Application



手机壳
Phone Case



KT板
KT Board



标识标牌
Signage



亚克力灯箱
Acrylic



酒瓶
Bottle



礼盒
Gift Box

机器参数 Machine parameters

机型/Model	YF-7590T UV平板机 YF-7590T UV Flatbed Printer	
喷头/Printhead	东芝CE4喷头 Toshiba CE4 print head	
喷头数量/Print Head number	2-8	
打印模式/Print Mode	4C/6C/4C+W/6C+W/4C+W+V/6C+W+V	
打印尺寸/Print Width	750mm X 900mm	
打印速度 Print Speed (sqm/h)	标准 6PASS	7 m ² /h
	高精 8PASS	5 m ² /h
打印分辨率/Print Resolution	600*1200 DPI	
介质类型 Media Type	玻璃、亚克力、木板、瓷砖、金属板、PVC板、发泡板、3C产品、皮料等材料 Glass, Acrylic, Wood, Ceramic, Metal Sheet, PVC Sheet, Plastic, 3C product and etc.	
介质厚度 Media Thickness	材料厚度 ≤ 150mm Max 150mm	
墨水类型 Ink Type	LED环保型UV墨水(不含VOC) UV Curing Ink (None VOC)	
特殊墨水 Special Ink	LED白色墨水或透明光油可选 Optional White Ink or Varnish	
固化系统 Curing System	LED灯固化系统 LED Curing System	
输入格式/File Format	TIFF/PDF/JPEG/EPS	
RIP软件 RIP	Unitedfancy	
数据传送接口/Data Connector	USB3.0	
输入电源 Power	220VAC(±10%) 单相, 50/60HZ 220VAC(±10%) Single Phase, 50/60 HZ	
机器功耗/Power Consumption	2.5KW	
机器尺寸/净重 Machine Size/N.W.	2.24m(L)*1.79m(W)*1.44m(H)/550KG	
包装尺寸/毛重 Packing Size/G.W.	2.34m(L)*1.90m(W)*1.55m(H)/600KG	
环境要求 Environment Requirement	独立、洁净、低尘、少光照、通风良好的工作间环境温度: 20°C - 28°C, 相对湿度: 40% - 60% seperated, clean, low dust, well-ventilated, environmental temperature: 20°C-28°C relative humidity: 40%-60%	

注: 以上技术参数如有变动恕不另行通知, 以实际设备为准。
Above specification will be changeable without notice